



THE UNIVERSITY OF RHODE ISLAND GRADUATE SCHOOL OF OCEANOGRAPHY



Oregon State University College of Earth, Ocean, and Atmospheric Sciences





Operating Institutions



R/V Taani

R/V Resolution

R/V TBD



Oregon State University



THE UNIVERSITY OF SOUTHERN MISSISSIPPI

THE UNIVERSITY OF RHODE ISLAND GRADUATE SCHOOL OF OCEANOGRAPHY



Oregon State University College of Earth, Ocean, and Atmospheric Sciences




THE UNIVERSITY OF SOUTHERN MISSISSIPPI

Establishing Scope: RCRV Over Time

2009: 155'

2012: 175'


2016: 193'

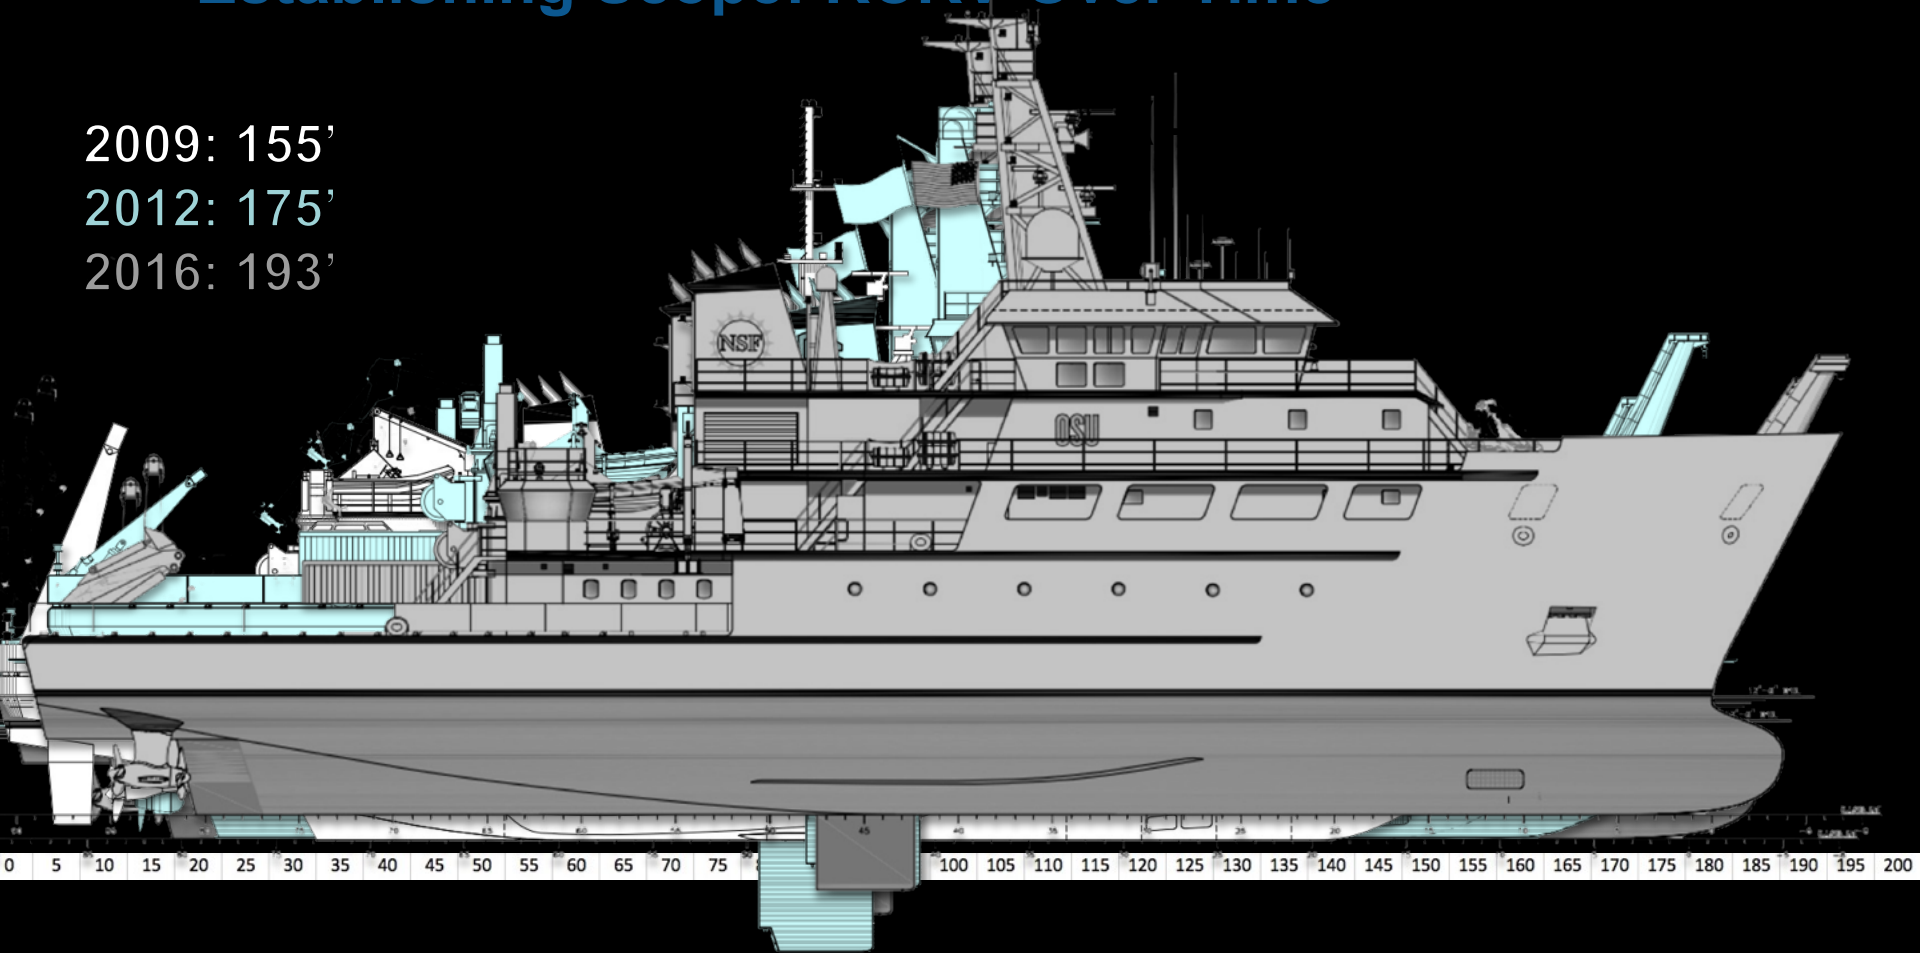



R/V Resolution Particulars

- Length overall199 ft
- Beam 41 ft
- Draft @ amidships12.5 ft
- Regulatory Tonnage .1549 GT
- Cruise speed11 kt
- Max speed13 kt
- Range6600 nm @ 12 kts
- Endurance21 days min.
- Dynamic Positioning.....ABS DP-1
- Science/Tech Berths 16
- Crew Berths13
- Retractable Centerboard (drop keel)
- A-frame dimensions25'H x 20'W
- Multibeam SONAR....EM304, 2040
- Number winches3
- Ice ClassABS C0

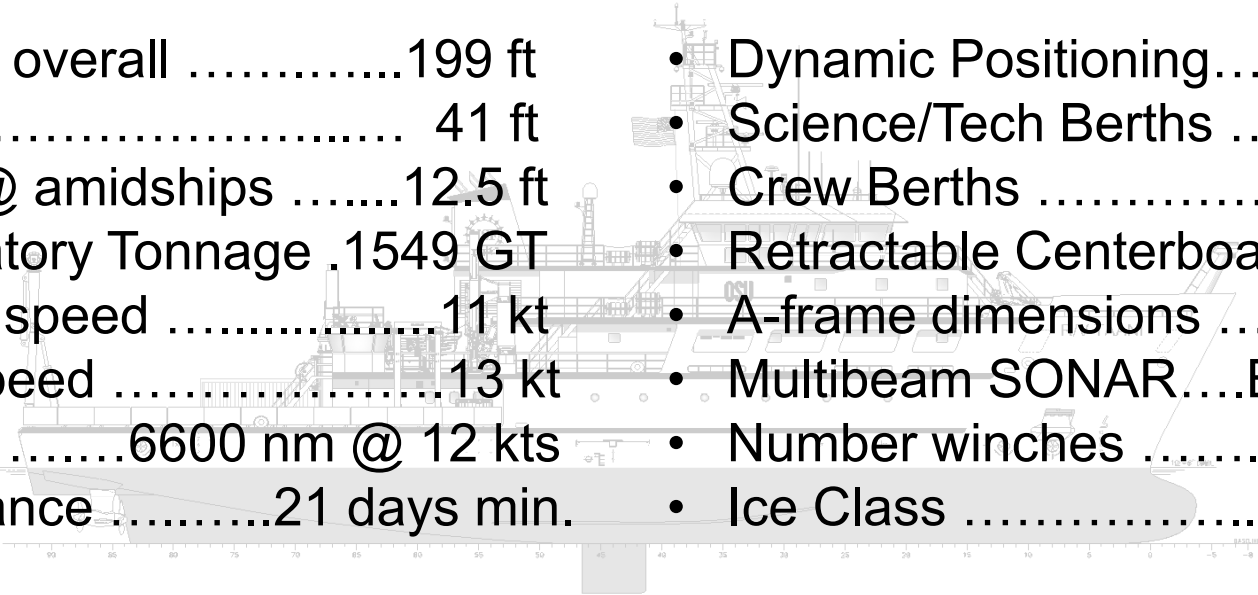

Over the Side Handling Equipment

Main Crane



- Folding, telescoping, knuckle boom
- 55 ft Max reach
- 35,000 lb at 20 ft
- Towing capable

Launch and Recovery System

- Hands Free deployment and recovery
- Automated deck to water level
- Automated deck to internal lab
- Vertical and towing capable

Stern A-Frame

- Double-Articulating
- 25 ft from deck to center
- 20 ft width between legs
- Rotating cross beam w/ bolting flange

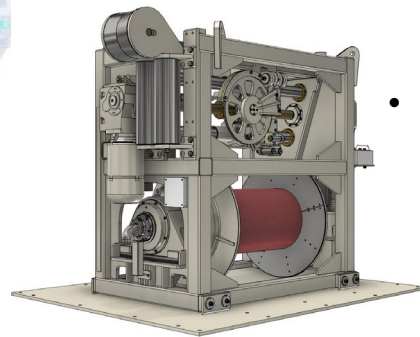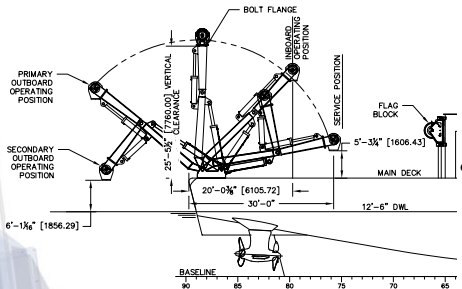

Winches

Oceanographic

- Heave Compensation
- Auto Pay in/Pay out
- DLT 60,000 lbf
- Max pull 34,000 lbf
- 10,000 Meters

Hydrographic

- Heave Compensation
- Auto Pay in/Pay out
- DLT 11,600 lbf
- Max pull 3,400 lbf
- 10,000 Meters




Support Equipment

Vans:

- Personnel X2
- Cold Stores X3
- Chem. Storage X3

Deck Equipment:

- Portable A-frame X3
- Portable Crane X3
- Portable Winch X3
- Transducer Pole X3
- Workboat/Skid X3
- PCDRM Coring X1
- Deck/Frame X3
 - Tuggers
- Blocks and Spares X3

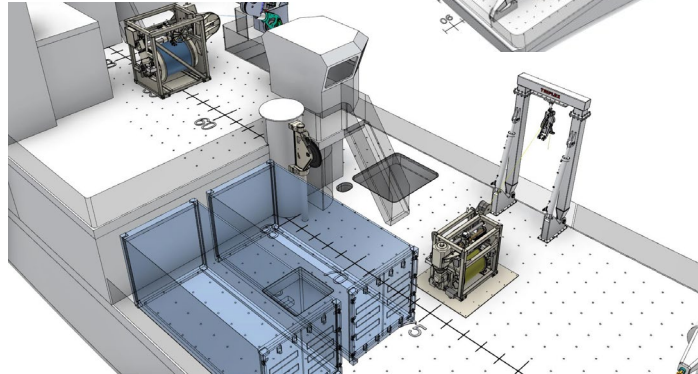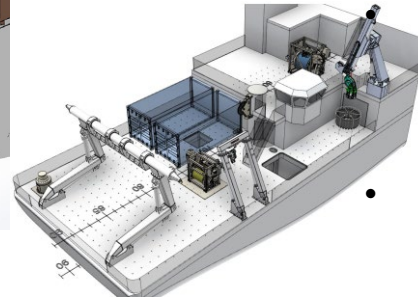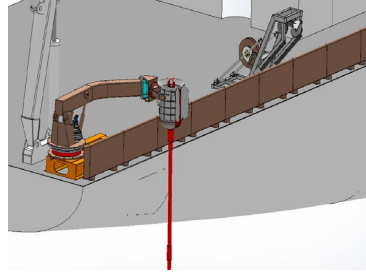

Tension Members

Oceanographic Winch

- 9/16", 3x19 Wire Rope
- .681" EO Mech. Cable
- 5/8" Plasma 12 Strand
- Hydrographic Winch
 - .393 EO Mech. Cable
 - 3/8" Plasma HiCo 12
 - Cortland EV701272
 - 3 copper
 - 3 Fiber
 - Steel Tube
- Portable Winch
 - .322" EM Cable

Centerboard

- Spare Foot X1


Acoustic Suite

Sonar Flat Forward

- Kongsberg EM304: 0.5° transmit x 1.0° receive
- Kongsberg EK80: 38 kHz, 70 kHz, 120 kHz, 200 kHz (all split beam)
- Kongsberg TOPAS subbottom profiler
- Primary 12 kHz transducer
- Sonar self-noise hydrophones (3)
- 3 spare 19" holes for transient transducers

Centerboard

- Kongsberg EM 2040
- Teledyne RDI 75 kHz Ocean Surveyor ADCP
- Teledyne RDI 300 kHz Workhorse ADCP
- Secondary 12 kHz transducer
- (1) spare 12inch penetration for transient transducers
- Self-noise hydrophone (1)
- Reson SVP-70 Sound Speed Sensor

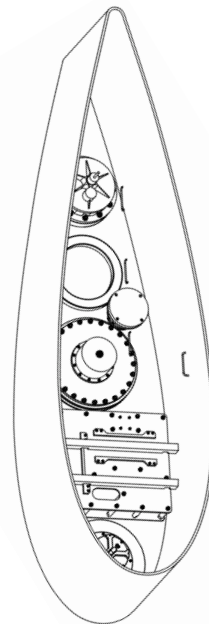


Other Systems

- Benthos UDB-9000
- Knudsen 3260
- USBL System

Portable Units and Spares

- EM 712 2° x 2°
- EM 2040C
- EK80 Complete
- Sonar Calibration Kit

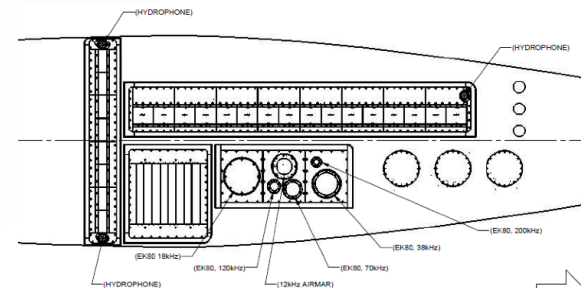



Sensors



Underway Surface Seawater Sensors

- 7x SBE-45 Thermosalinograph
- 7x SBE-38 Intake Temperature
- 10x SBE-43 Oxygen Sensor
- 12x ECO-Triplet (3 configurations)
- 4x WetStar Fluorometer
- 10x C-Star Transmissometer
- 3x TBD pCO₂*
- 4x SUNA V2 Nitrate Sensor
- 4x SeaFET V2 pH Sensor
- 4x Flow Control System

CTD Sensors

- 6x SBE 911 w/Dual T/C Sensors
- 8x Biospherical PAR (Profiling)
- 10x shared with Underway SBE-43 Oxygen Sensor and C-Star Transmissometer
- 7x ECO Fluorometer FLRTD
- 7x SBE-18 pH

Atmospheric Sensors

- 7x Biospherical PAR (Reference)
- 4x Vaisala PTU330
- 4x Vaisala WXT536
- 8x Kipp and Zonen Pyranometer
- 8x Kipp and Zonen Pyrgeometer
- 3x Vaisala Present Weather FD71
- 4x RM Young Rain Gauge
- 13x Gill 2D & 3D Ultrasonic Anemo
- 16x GoPro (Sky, Sea Conditions)
- 3x ROSR Radiometer*
- 3x Vaisala CL51 Cloud Radar*
- 3x Picarro G2401 Atmos Gases*
- 4x HyperSAS Systems/HyperOCR

Optional Underway Surface Seawater Sensors (at science request)

- 3x WETLabs AC-S
- 3x TBD Particle Concentration & Particle Size Distribution

Other Sensors

- 3x TBD Inspection Class ROV
- 6x Kongsberg Seapath 380+
- 3x Centerboard IXBlue Fiber GY
- 3x WaMoS Wave Radar

* Includes replaceable spares

Vessel Personnel Capacity

After discussion with OI's, academic fleet and industry the suggested operational crew includes :

Bridge

- Master
- Chief Mate
- Second Mate

Engineering

- Chief Engineer
- 1st Engineer
- 2nd Engineer
- Electrotechnical Engineer

Deck

- Bosun
- AB1
- AB2
- AB3

Galley

- Chief Steward
- Assistant Cook

Marine Technicians

- MarTech. 01
- MarTech. 02



Crew:	13
Technicians:	02
Science:	14
W/ Personnel Van	18



R/V Taani Build Update


Under Construction

- Module 21
 - Shell Plate Fitting
- Module 22
 - Interior Weld out
- Module 31
 - Main deck and Domestic Equipment room pipefitting, Equipment Foundations
- Module 32
 - Pipe fitting and Port side shell plating framing weld out, stbd side shell panel construction
- Module 91
 - Major side frames and stanchion installation, Aft Skeg closure plate fitting started

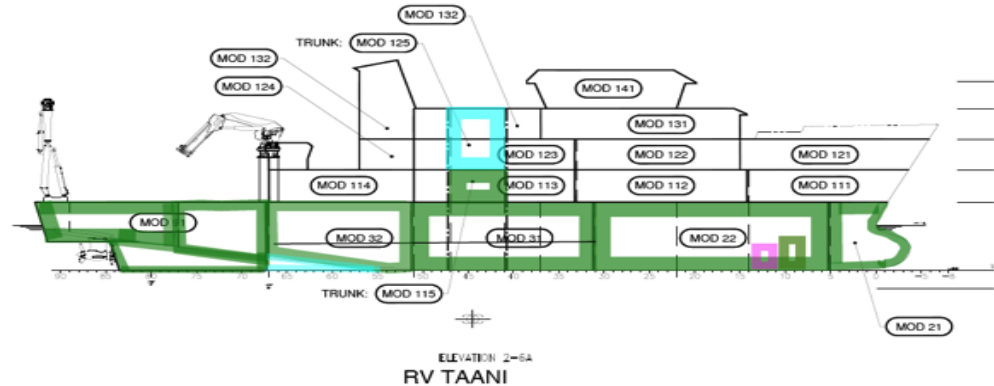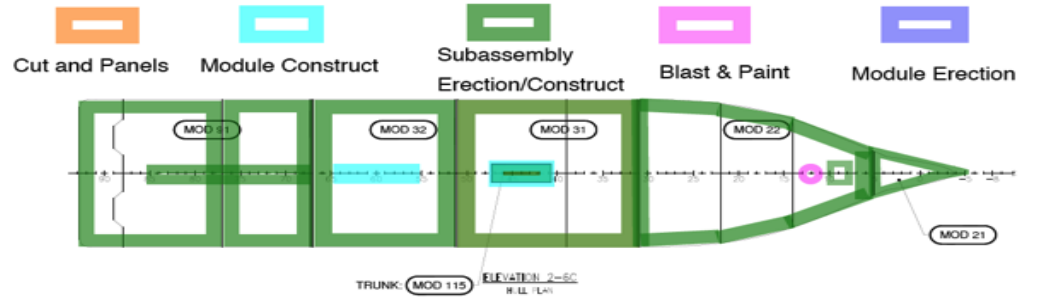



R/V Resolution Build Plan

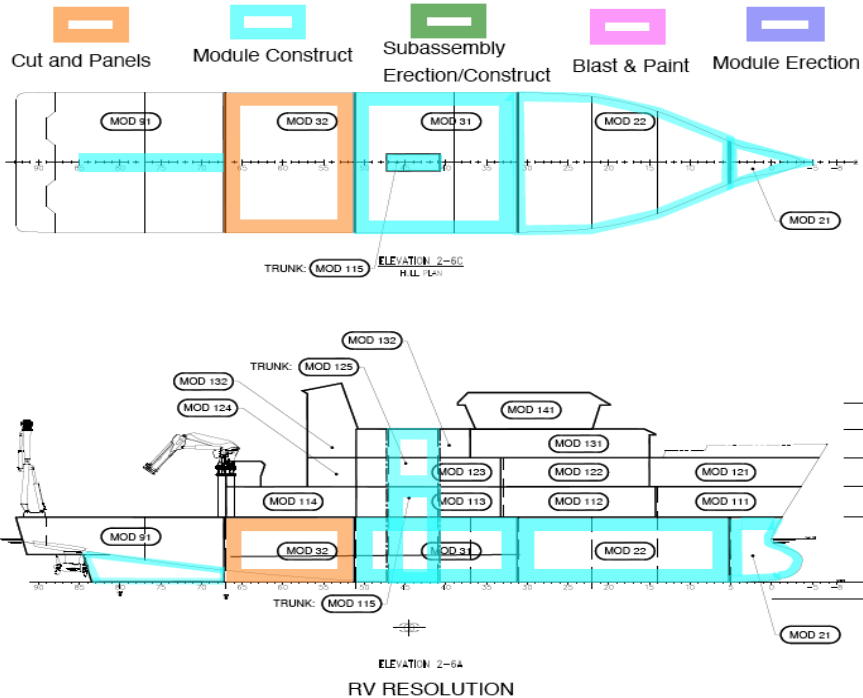

Under Construction


- Module 21
- Module 22
 - Inner bottom tank top and bulkheads assembly on platen in assembly building.
- Module 31
 - Inner Bottom tank top and bulkheads assembly on platen in assembly building. Aluminum portion of centerboard in construction.
- Centerboard Fab. Started
- Module 32
 - Panel Fabrication
- Module 91 (Start 10/25)





RCRV Class Delivery Timeline

RCRV Schedule Summary

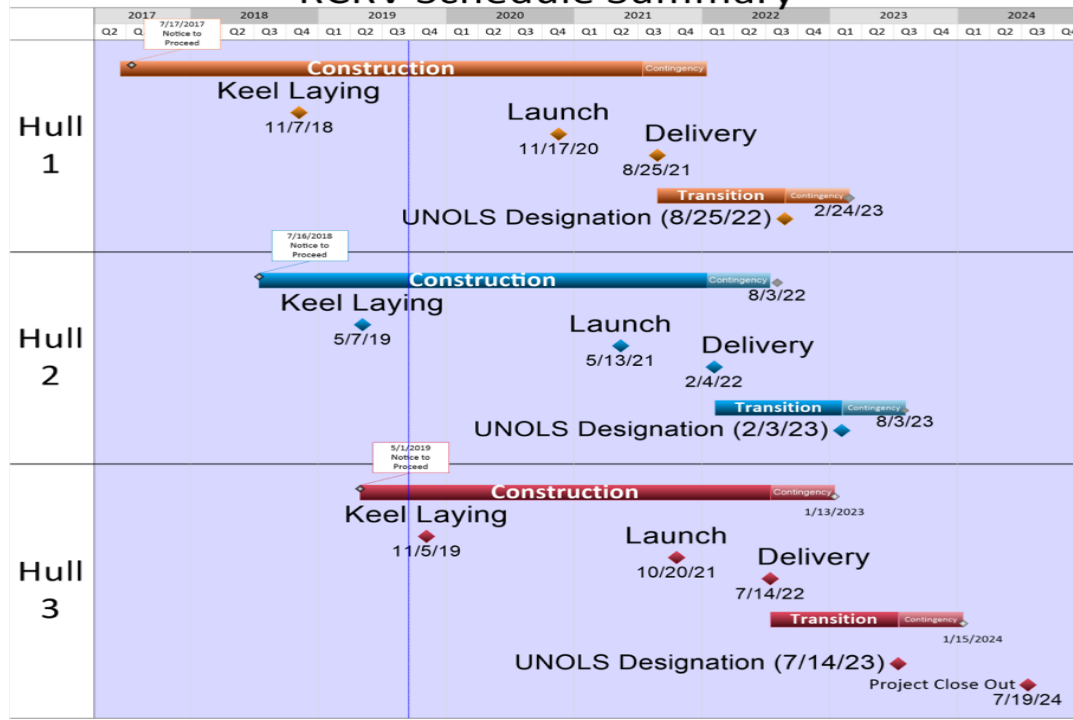



Webcams



[RCRV_Cam-01](#)

[RCRV_Cam-02](#)

[RCRV_Cam-03](#)

[RCRV_Cam-04](#)



